



**NEW PRODUCT**

**Fig. 0592**  
Style 1

**Fig. 0592 - 90° Angled Tank Vent with Swivel Elbow**  
Design Allows Elbow to be Rotated to any Position

**CONSTRUCTION:**

- Black or White Polymer Splash Guard
- Two Styles of Splash Guards
- Removable 30 Mesh Stainless Steel Wire Screen Flame Arrestor (for use with gasoline applications)
- Zinc Alloy Elbow

**NEW PRODUCT**

**Fig. 0592**  
Style 2

Ordering Information						
Splash Guard Style	Splash Guard Color	Hose Size Inches	Max. Hull Thickness Inches	OEM Bulk Pkg. 50 Pcs.	Ship Wt. Carton Lbs. OEM Bulk	
Style 1	Black	5/8	5/8	0592014BLK	12.0	
Style 1	White	5/8	5/8	0592014WHT	12.0	
Style 2	Black	5/8	5/8	0592024BLK	12.0	
Style 2	White	5/8	5/8	0592024WHT	12.0	

Fig 0592 Spare Splash Guard Style 1: Black - Cat. No. 0592B1099A, White - Cat. No. 0592W1099A  
Fig 0592 Spare Splash Guard Style 2: Black - Cat. No. 0592B2099A, White - Cat. No. 0592W2099A



Style 1 Mounted



Style 2 Mounted



**Fig. 0597**

**Fig. 0597 - Straight Tank Vent**

**Fig. 0598 - 90° Angled Tank Vent with Swivel Elbow**  
Design Allows Elbow to be Rotated to any Position

**CONSTRUCTION:**

- Stainless Steel Escutcheons with Black or White Polymer Splash Guard
- Removable 30 Mesh Stainless Steel Wire Screen Flame Arrestor (for use with gasoline applications)
- Fig 0598: Zinc Alloy Elbow

Ordering & Tech Information						
Style	Color	Hose Size Inches	Max. Hull Thickness Inches	Dealer Pkg. 5 Cards 1 Pc. per Card	OEM Bulk Pkg. 50 Pcs.	Ship Wt. Carton Lbs. DP/OEM Bulk
Straight	Black	5/8	5/8	0597DP4BLK	0597004BLK	1.8/14.0
Straight	White	5/8	5/8	0597DP4WHT	0597004WHT	1.8/14.0
90° Angle	Black	5/8	5/8	0598DP4BLK	0598004BLK	1.7/14.7
90° Angle	White	5/8	5/8	0598DP4WHT	0598004WHT	1.7/14.7

Spare Splash Guard Cap: Black, Cat. No. 0570B0099A, White, Cat. No. 0570W0099A

**Fig. 0598**

**Note: All of the Above Vents are Designed to Meet the Requirements of U.S.C.G. Safety Standards January 31, 1977, for Gasoline Fuel Systems 33 CFR 183.**



**Fig. 0570 - Straight Tank Vent**  
**Fig. 0571 - 90° Angled Tank Vent with Swivel Elbow**  
Design Allows Elbow to be Rotated to any Position

**CONSTRUCTION:**

- Fig. 0570: Chrome Plated Zinc Alloy with Black or White Polymer Cap
- Fig. 0571: Zinc Alloy Elbow
- Removable 30 Mesh Stainless Steel Wire Screen Flame Arrestor (for use with gasoline applications)



Fig. 0570



Fig. 0571

6

**Ordering Info**

Style	Color	Hose Size Inches	Max. Hull Thickness Inches	Dealer Pkg. 10 Cards 1 Pc. per Card	OEM Bulk Pkg. 50 Pcs.	Ship Wt. Carton Lbs. DP/OEM Bulk
Straight	Black	5/8	3/4	0570DP4BLK	0570004BLK	2.4/9.5
Straight	White	5/8	3/4	0570DP4WHT	0570004WHT	2.4/9.5
90° Angle	Black	5/8	3/4	0571DP4BLK	0571004BLK	2.4/9.3
90° Angle	White	5/8	3/4	0571DP4WHT	0571004WHT	2.4/9.3

Spare Splash Guard Cap: Black, Cat. No. 0570B0099A, White, Cat. No. 0570W0099A

**Fig. 0506 - Straight Tank Vent**  
**Fig. 0561 - 90° Angled Tank Vent with Swivel Elbow**  
Design Allows Elbow to be Rotated to any Position

**CONSTRUCTION:**

- Fig. 0506: Chrome Plated Zinc Alloy with Black or White Polymer Splash Guard
- Fig. 0561: Zinc Alloy Elbow
- Removable 30 Mesh Stainless Steel Wire Screen Flame Arrestor (for use with gasoline applications)



Fig. 0506



Fig. 0561



**Ordering Info**

Style	Color	Hose Size Inches	Max. Hull Thickness Inches	Dealer Pkg. 10 Cards 1 Pc. per Card	OEM Bulk Pkg. 50 Pcs.	Ship Wt. Carton Lbs. DP/OEM Bulk
Straight	Black	5/8	3/4	0506DP4CHR	0506004CHR	2.1/8.1
Straight	White	5/8	3/4	0506DP4WHT	0506004WHT	2.1/8.1
90° Angle	Black	5/8	1	0561DP4CHR	0561004CHR	2.8/11.5
90° Angle	White	5/8	1	0561DP4WHT	0561004WHT	2.8/11.5

Splash Guard Black: Cat. No. 0518000BLK Splash Guard White: Cat. No. 0518000WHT

**Note: All of the Above Vents are Designed to Meet the Requirements of U.S.C.G. Safety Standards January 31, 1977, for Gasoline Fuel Systems 33 CFR 183.**



Fig. 0509

Fig. 0509 - Tank Vent

**CONSTRUCTION:**

- Chrome Plated Bronze
- Removable 30 Mesh Stainless Steel Wire Screen Flame Arrestor (for use with gasoline applications)

**Ordering & Tech Information**

Hose Size Inches	Max. Hull Thickness Inches	Dealer Pkg. 5 Cards 1 Pc. per Card	OEM Bulk Pkg. 50 Pcs.	Ship Wt. Carton Lbs. DP/OEM Bulk
5/8	3/4	0509DP4CHR	0509004CHR	1.3/10.4
3/4	5/8	0509DP5CHR	0509005CHR	1.6/13.4

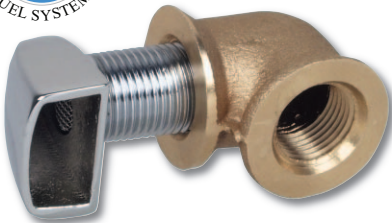


Fig. 0503

Fig. 0503 - Tank Vent

**CONSTRUCTION:**

- Chrome Plated Bronze
- Removable 30 Mesh Stainless Steel Wire Screen Flame Arrestor (for use with gasoline applications)

**Ordering & Tech Information**

Thread Size Inches	Max. Hull Thickness Inches	Dealer Pkg. 5 Cards 1 Pc. per Card	OEM Bulk Pkg. 50 Pcs.	Ship Wt. Carton Lbs. DP/OEM Bulk
3/8	7/8	0503DP3CHR	0503003CHR	2.1/16.0
1/2	7/8	0503DP4CHR	0503004CHR	1.9/15.5



Fig. 0515

Fig. 0515 - Tank Vent

**CONSTRUCTION:**

- Chrome Plated Bronze
- Removable 30 Mesh Stainless Steel Wire Screen Flame Arrestor (for use with gasoline applications)

**Ordering & Tech Information**

Thread Size Inches	Max. Hull Thickness Inches	Dealer Pkg. 5 Cards 1 Pc. per Card	OEM Bulk Pkg. 50 Pcs.	Ship Wt. Carton Lbs. DP/OEM Bulk
3/8	5/8	0515DP3CHR	0515003CHR	1.1/8.9
1/2	5/8	0515DP4CHR	0515004CHR	1.3/10.5




Fig. 0505

Fig. 0505 - Tank Vent

**CONSTRUCTION:**

- Chrome Plated Cast Bronze
- Removable 30 Mesh Stainless Steel Wire Screen Flame Arrestor (for use with gasoline applications)

Designed to meet the requirements of the National Fire Protection Association Booklet No. 302, Section No. 323 on vent pipe outlets. The 1/2 inch N.P.T. is off center to create a water baffle.

**Ordering Info**

Dealer Pkg. 10 Cards 1 Pc. per Card	OEM Bulk Pkg. 50 Pcs.	Ship Wt. Carton Lbs. DP/OEM Bulk
0505DP0CHR	0505000CHR	2.5/10.8

**Tech Info**

O.D. Flange: 2-1/2"
O.D. Neck: 1-3/16"
Length Neck: 1-1/2"
Screw Size: #8

Note: All of the Above Vents are Designed to Meet the Requirements of U.S.C.G. Safety Standards January 31, 1977, for Gasoline Fuel Systems 33 CFR 183.